

Installation Instructions


Pitco Solstice (Built-In) Filtration System

SUPERSORB[®]
CARBONPADS

Getting the most out of your frying program



- 1) The Pitco Solstice Built-In Filtration System will look similar to the photo above.

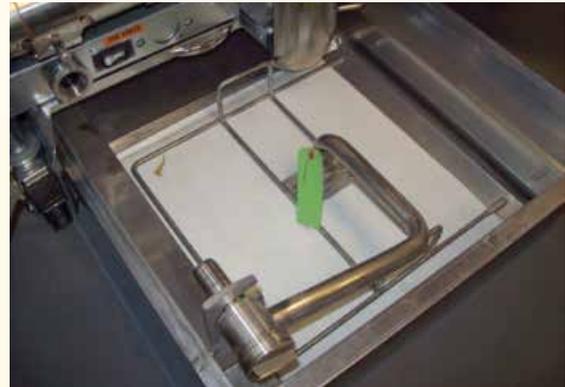

- 2) The Pitco Solstice Built-In Filter Machine needs to be adapted to use Filtercorp's Unifit Adapter Kit. In the center of the filtering pan, there is a Pitco Paper holder that must be removed. Reuse the stainless steel arm or tube (marked with a green tag in the photo above).



- 3) After the Pitco Paper holder has been removed, insert the Filtercorp CarbonPad, **rough-bumpy side facing out**, into the F-95 Adapter holder. Close the hold down bar and clamp into place. Before placing the Filtercorp Unifit Adapter into the filter pan, always be sure the pan is completely dry.



- 4) Finally, connect the Pitco stainless steel arm to the Filtercorp Unifit Adapter. The Pitco Solstice Built-In Filter System is now ready to filter oil using Filtercorp SuperSorb[®] CarbonPads (as shown in the photo).

(continued)

Installation Instructions (continued)

SUPERSORB[®]
CARBONPADS

Pitco Solstice (Built-In) Filtration System



- 5)** Throughout the filtering process, especially during periods of heavy volume of frying, it will be necessary to lift the CarbonPad adapter and scrape the crumb debris off using a spatula or utensil. This should be done after the unit has COOLED.



- 6)** Preventative maintenance includes replacing the O-ring which is located inside the pipe opening (see photo) usually once a year. Pitco Part Number is 60068301. O-rings in good condition help create a tight seal to the pipe arm and Filtercorp CarbonPad adapter.

Always wear protective apparel when filtering hot oil which includes heat resistant gloves, face shield, and vinyl apron.



FILTERCORP

9805 NE 116th Street
PMB A-200
Kirkland, WA 98034
USA

Toll Free: (800) 473-4526
Telephone: (425) 820-4850
Fax: (425) 820-2816
Web: www.filtercorp.com



www.filtercorp.com